

Features

Bowl	Cast iron with Resicoat finish
Valve	Flexible brass tubing
Mecanism	Pilot valve
Fixation	Mural or on a post with installation bracket
Flow rate	Adjustable from 0 to 15-18 L/min
Water inlet	All directions
Connection	½ in - 12,5 mm
Thread	Male

Advantages

- Canadian exclusivity
- Easy clean filter without removing the mechanism
- Drain plug included in the bottom
- Angled bowl for better draining and cleaning
- Suitable for the body types of adult livestock
- Ideal for dairy cows, beef cattle and horses


Animal	Animal per drinker	Drinking height	
Calves	10	45 cm	17 3/4 in
Heifer	10	70 cm	27 ½ in
Dairy cow	5 à 10	70 to 80 cm	27 ½ to 31 ½ in
Beef cattle	10	70 to 80 cm	27 ½ to 31 ½ in
Foal	15	70 cm	27½ in
Pony	10	60 cm	23½ in
Horse	10	1 to 1,2 m	39 to 47 ¼ in



18 L
PER
MINUTE

1/2
IN MALE

CAST
IRON

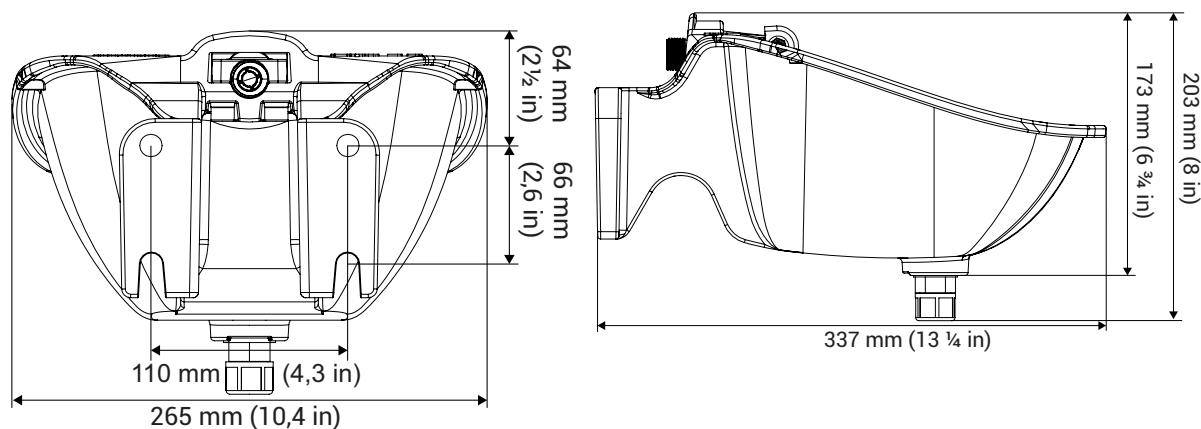

Accessories



Galvanised protection
071-6226



Installation bracket
071-6192



Anti-spill
064-5469

Pièces



T Female
070-4300



Maintenance kit
064-5502



Stainless steel springs
068-7155



Valve seals
072-6117